

Turret Milling Machine


Standard Accessories:

Draw bar; Tool & Tool box; Handle oil pump; Electrical box; Working lamp


Optional Accessories:



DRO ES-8 (950x400x400)



Machine vise

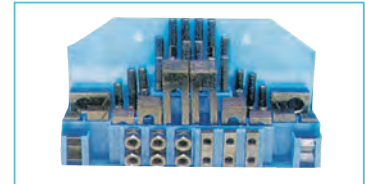

Universal clamping kits



Oil collecting plate



NT30, NT40 chuck and collets



R8 Collet chuck



Power feed unit



Convergent cabinet



Cooling system

		13112	13112-1	13113-1	13113-1	13113-2	13113-5	13113-3	13113-4	13114	13114-1	13116	13116-1	
Model		TM6323A	TM6323B	TM6325	TM6325A	TM6323B	TMU6325	TM6325C	TM6325D	TM6330	TM6330A	TM6333	TM6333A	
Table size		230x1067(9"x42") 230x1246(9"x49")		254x1270 (10"x50") 254x1370 (10"x54")		250x1270 (10"x50")	254x1270 (10"x50") 254x1370 (10"x54")	305x1370 (12"x54") 305x1500 (12"x60")		330x1370 (13"x54") 330x1500 (13"x54")				
Long travel		650 840		850 950		770	850 950	870 1000		840 1000				
Cross travel		305		420	400		420	420		380		368		
Vertical travel		400		420		400	420		430		450			
T-slot No. and size		3 x 16												
Ram travel		312					470					500		
Distance from spindle nose to table surface		0-415		0-405						0-350		0-450		
Spindle hole taper		(Standard): R8 (Optional): ISO 30/ISO 40						(Standard): ISO 40						
Spindle travel		127												
Spindle speed		(standard): (shift gradel) 50Hz 65-4500 60Hz: 80-5440 (optional): (variable) 65-4500 (optional): (variable) 65-3750												
Auto quill feed		(three steps): 0.04(0.0015"/0.08(0.003")/0.15(0.006")) mm/revolution												
Spindle motor		2.25Kw/3HP					2.25Kw/5HP			2.25Kw/5HP				
Head swivel		90°												
Head tilting		45°	45°	45°	45°	45°	45°	FIX	45°	45°	FIX	45°	FIX	
Dimension of package	one miller per case	1400x1476x2030				1516x1550x2080				1566x1650x2080		1800x2016x2180		
	two miller per case	1450x1570x2080				1650x1790x2170				1720x1800x2175		1800x2200x2180		
	three miller per case	1450x2180x2080				1650x2285x2235								
weight (kg)	1100	1160	1550	1380	1420	1650	1590	1590	1700	1750	2300	2350		
Old model	X6323A	X6323B	X6325	X6325A	X6323B	XU6325	X6325C	X6325D	X6330	X6330A	X6333	X6333A		