



Universal Radial Milling Machine



Gear head can be changed on



Horizontal milling

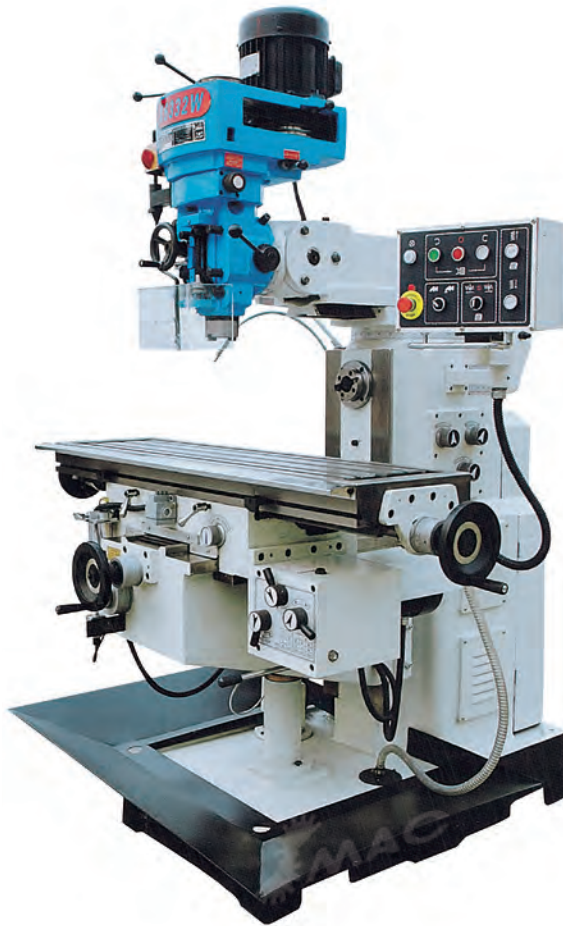

Inclination of head



Specifications		13122
		HVML6332W
Head movement (Left to right)		+/-45 degree
Head movement (front to rear)		+/-45 degree
Max. drilling dia (mm)		50; 30
Spindle taper		M.T.4; R8; ISO30 ISO40
Max. vertical milling dia (mm)		25
Max. boring dia (mm)		120
Max. tapping dia (mm)		M16
Distance. Main spindle to table surface (mm)		90-370
Distance horizontal spindle to table surface (mm)		0-400
Spindle speed range (r.p.m.)(steps)	Vertical	80-5440rpm(16) 115-1750
	Horizontal	40-1300 (12)
Spindle travel (mm)		120
Feeding of quill		3 steps; 0.04, 0.08, 0.15mm/r
Table size (mm)		1250 x 320 Optional: 1370 x 320mm
Table travel (mm)		600 x 300mm Optional: 700 x 300mm
Vertical travel (mm)		280
Motor for rapind of table traverse X/Y		750W
Motor for vertical of table traverse Z		750W
Motor (kw)	Vertical	2.2
	Horizontal	2.2
Overall dimensions (mm)		1500 x 1700 x 2000
N.W./G.W.		1500/1600